


NPS	L	d	NPT	D	Weight (lb)
1/4"	2.402	0.315	1/4"	1.280	0.353
3/8"	2.402	0.394	3/8"	1.280	0.353
1/2"	2.402	0.551	1/2"	1.280	0.375
3/4"	2.598	0.748	3/4"	1.535	0.573
1"	3.051	0.945	1"	1.870	0.904
1 1/4"	3.386	1.220	1 1/4"	2.303	1.455
1 1/2"	3.740	1.535	1 1/2"	2.598	2.028
2"	4.173	1.929	2"	3.130	2.888

Nominal pressure			4.0Mpa				
Test pressure	Shell test	6.0	Mpa	Test medium	Water	Test temperature	Normal temperature
	Seal test	4.4			Air		
	Gas seal test	0.6					
Applicable medium			Water, Oil, Gas				
Applicable temperature			-20~302°F				

NOTE:

1. Design and Manufacture for valve according to ASME B16.34.
2. Inspection and Test for valve according to API 598.
3. The connection of screwed for valve according to ANSI B1.20.1.

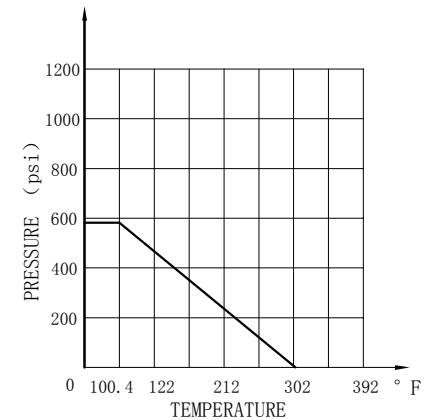

NO.	DESCRIPTION	Q' TY	MATERIAL
5	BONNET	1	A351 CF8M
4	GASKET	1	PTFE
3	SPRING	1	SS316
2	DISC	1	A351 CF8M
1	BODY	1	A351 CF8M
DISCOUNT VALVES			
MARK	BEFORE MODIFIED	AFTER MODIFIED	DATE
DRA.		APP.	
CHK.		DATE	
			SCALE
			WWW.DISCOUNTVALVES.COM